

FIG. 5

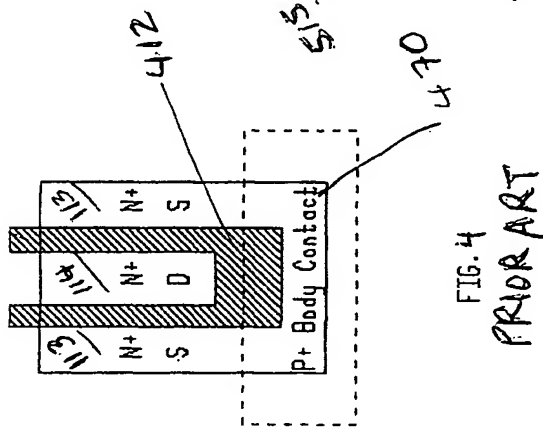


FIG. 4

PRIOR ART

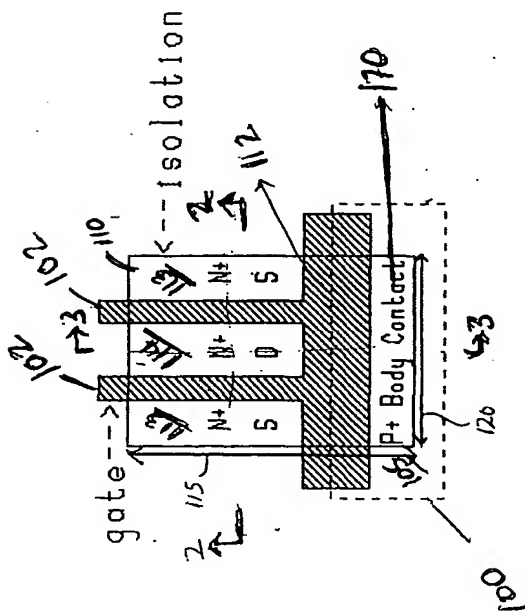


FIG. 1

PRIOR ART

FIG. 2



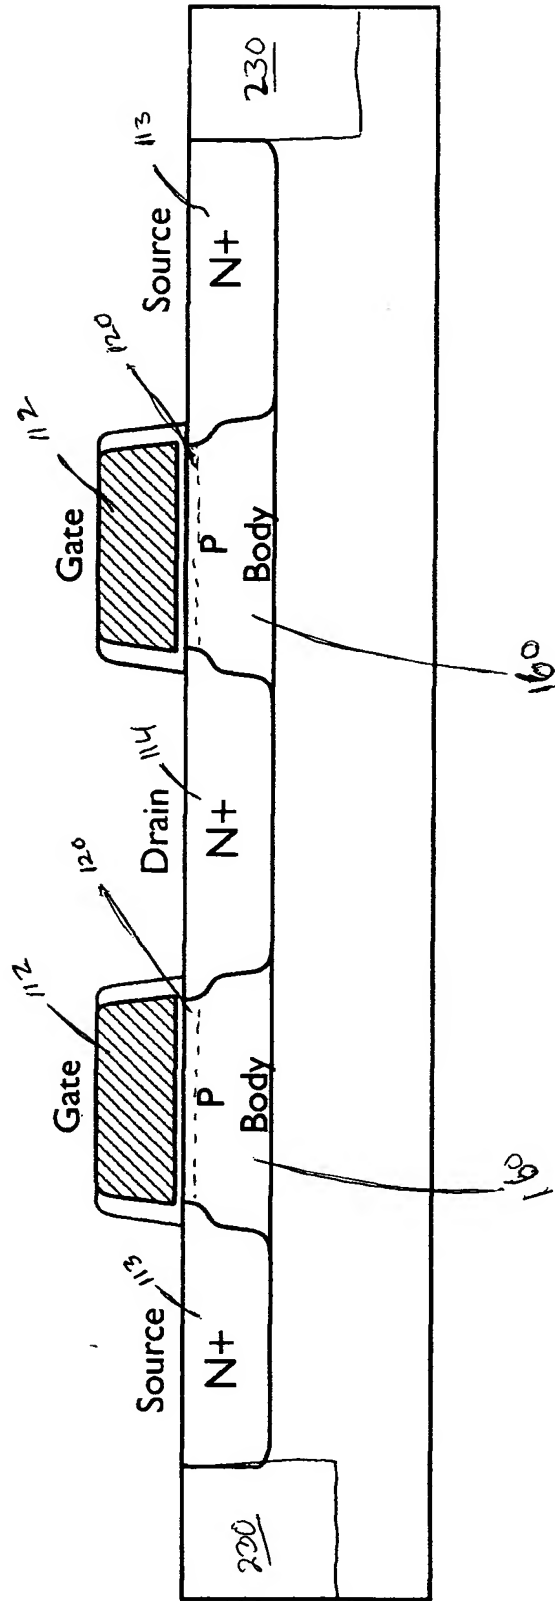


FIG. 3

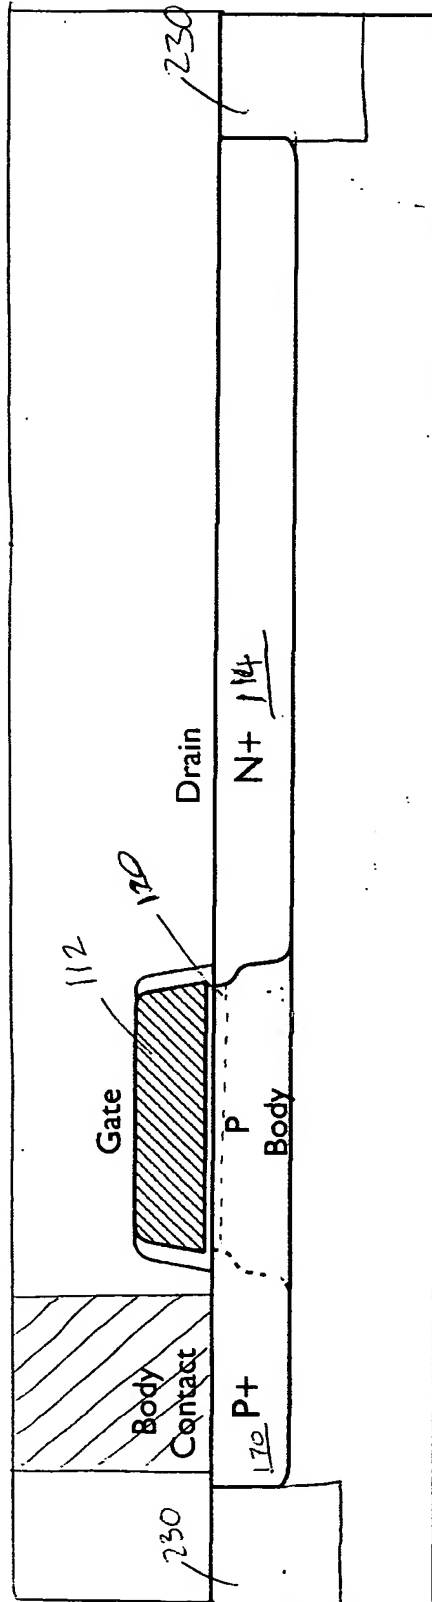


4/18

FIG. 6

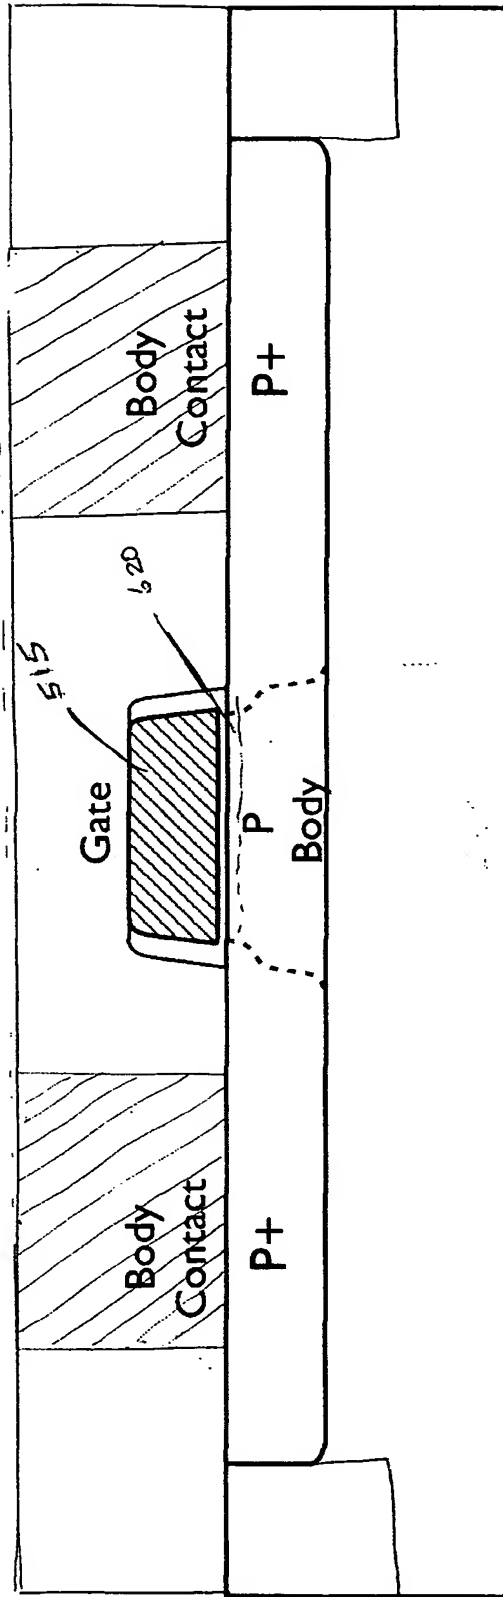

5/18

Figure 7A

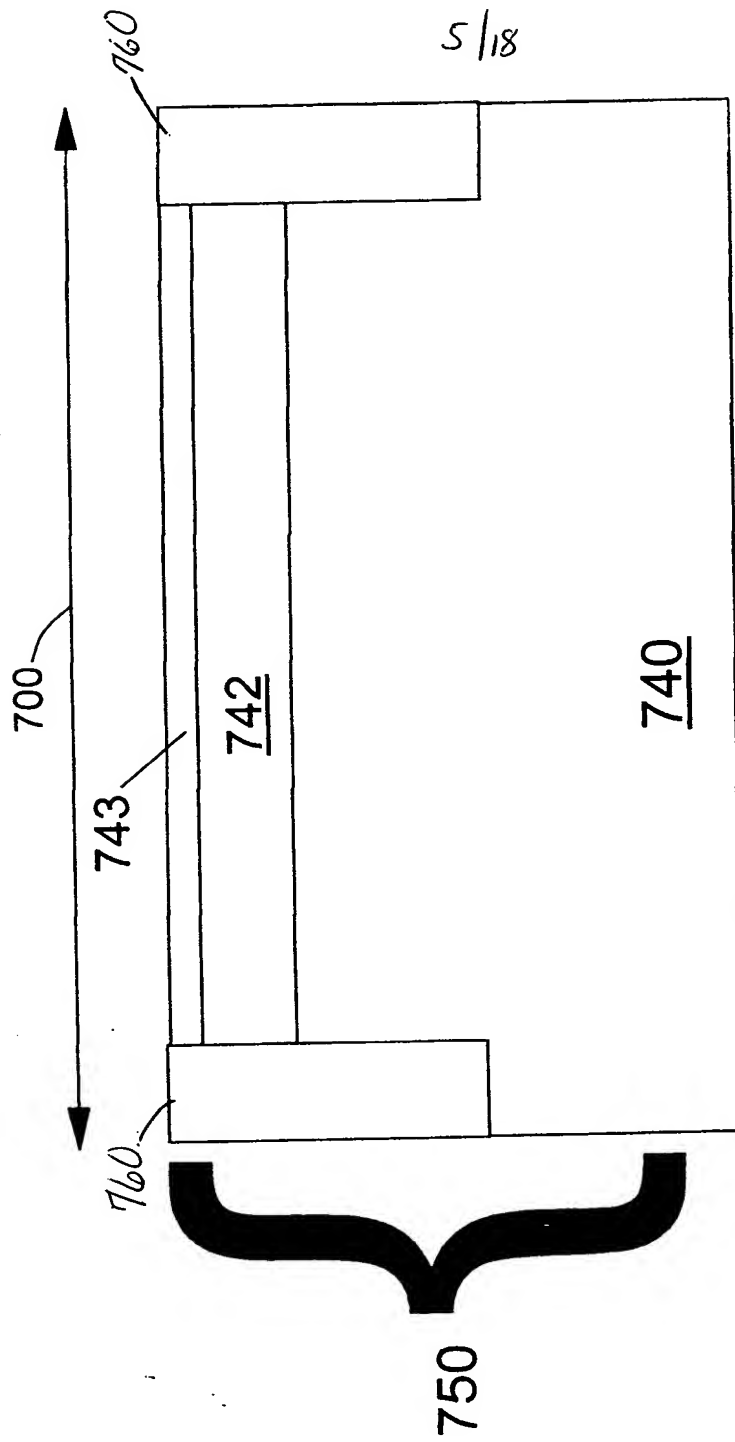

6/18

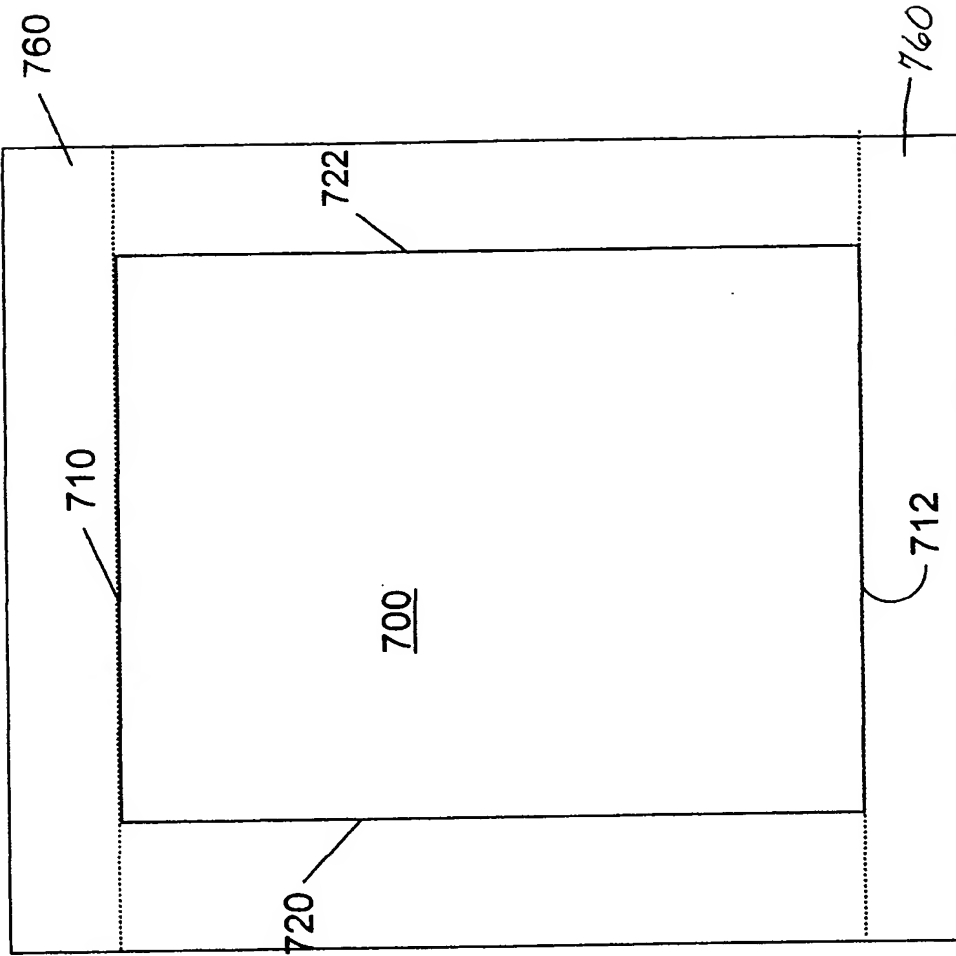


Figure 7B

7/18

Figure 8


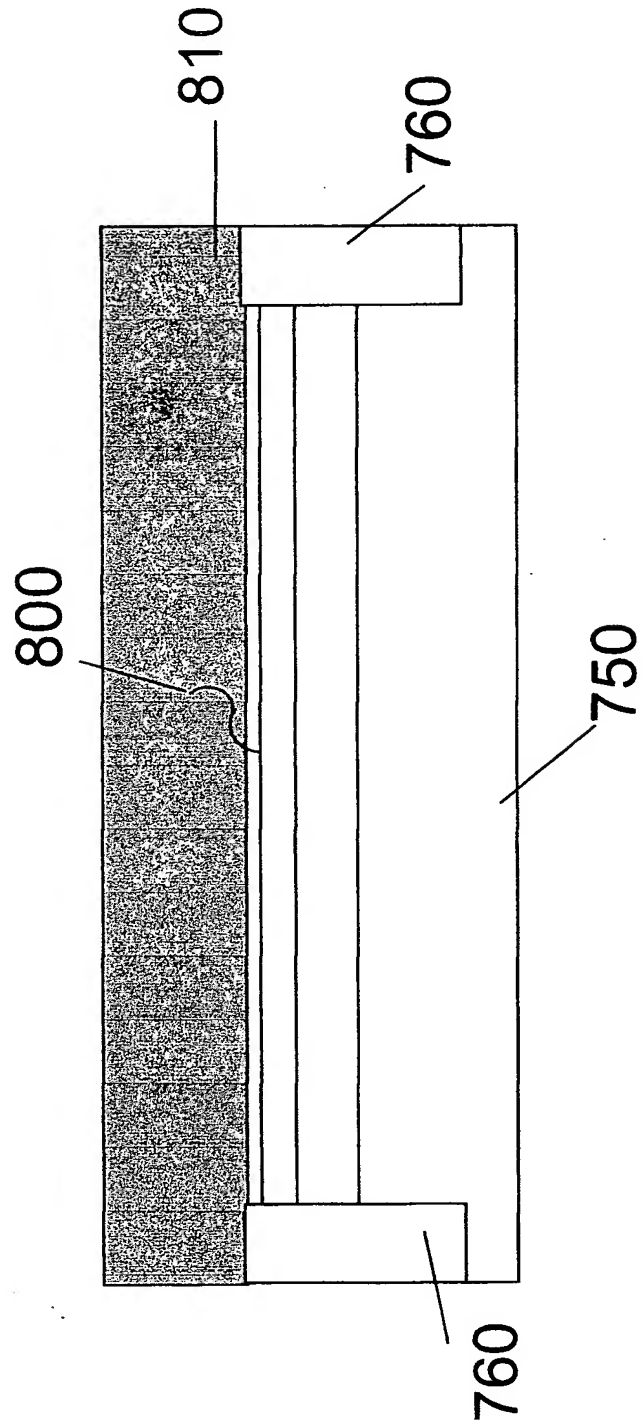


Figure 9

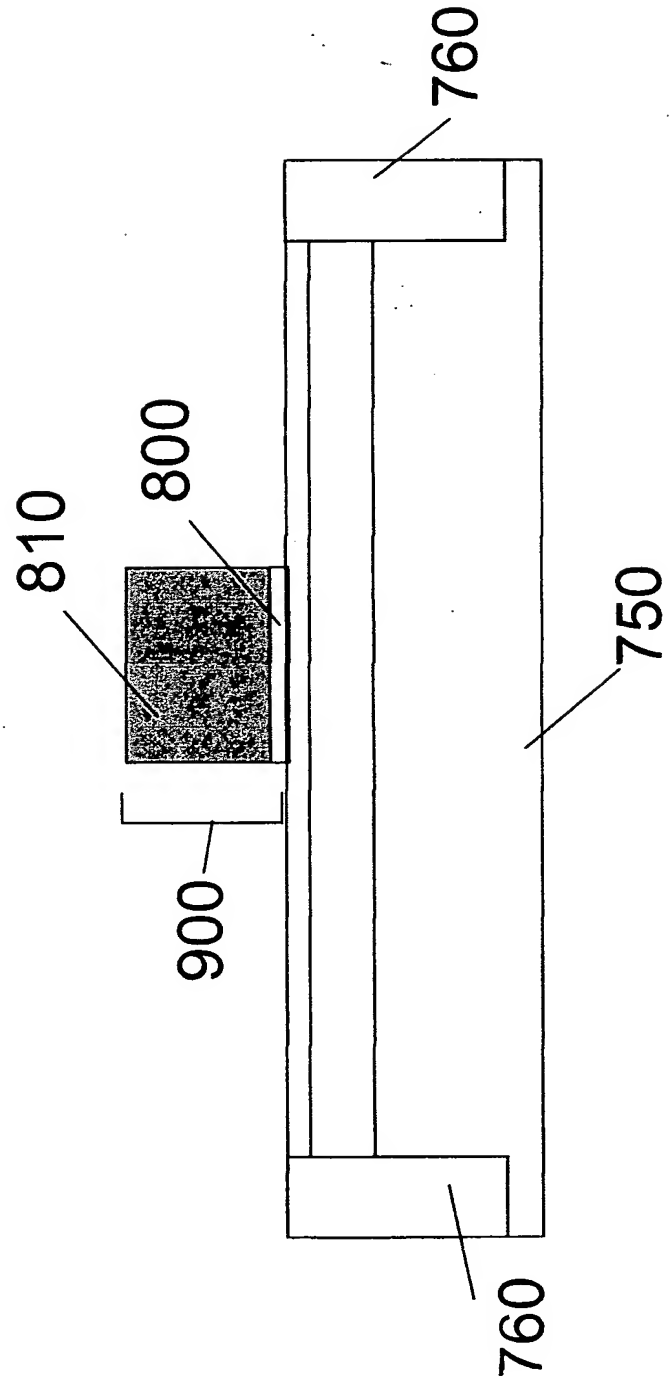

P04920030171451

9/18

Figure 10


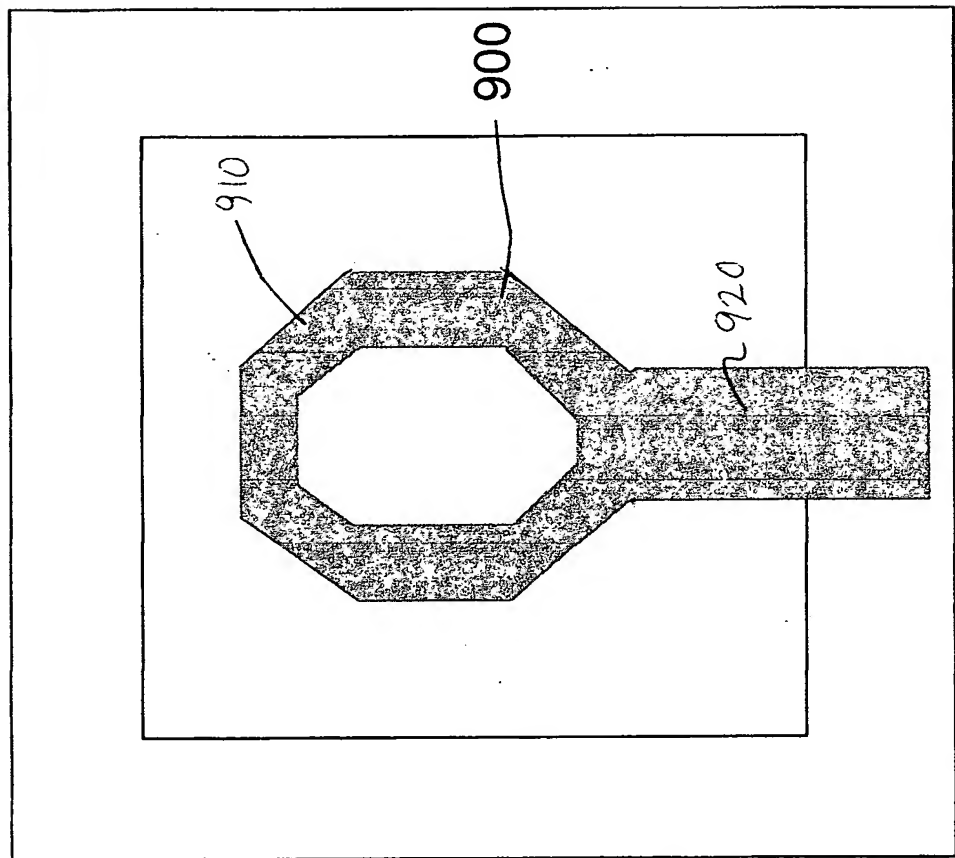


Figure 11A

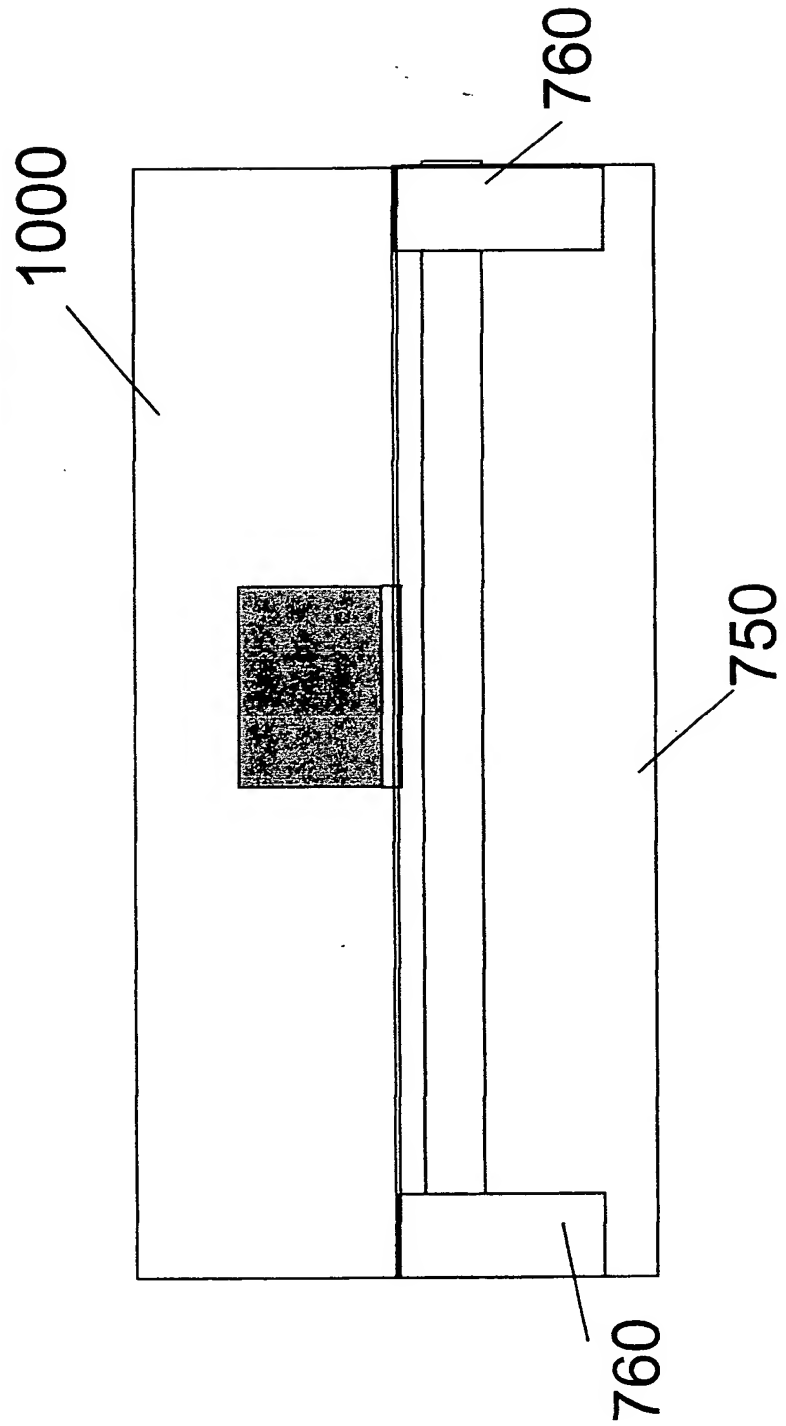

11/18

Figure 11B

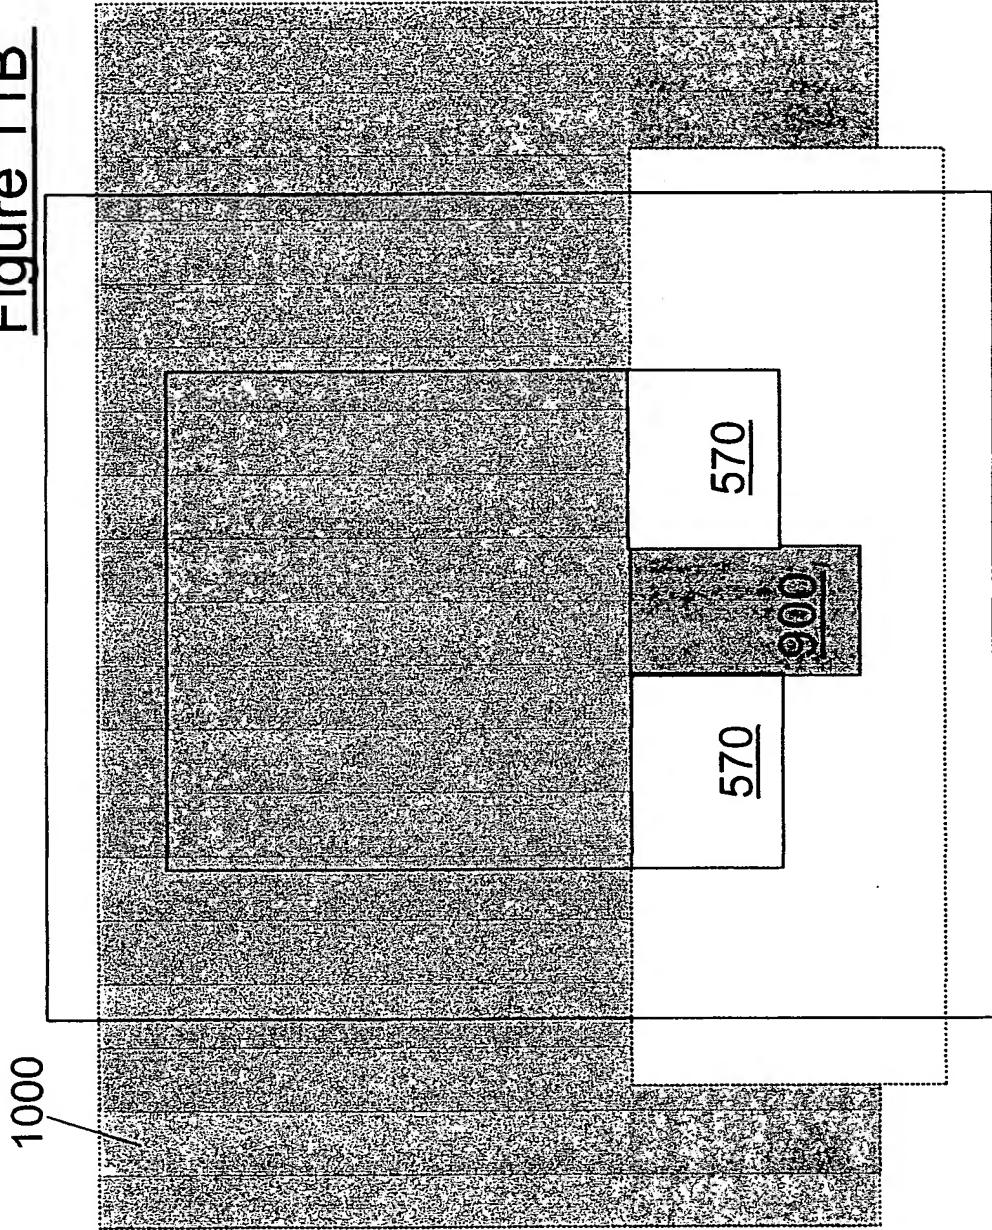


Figure 12

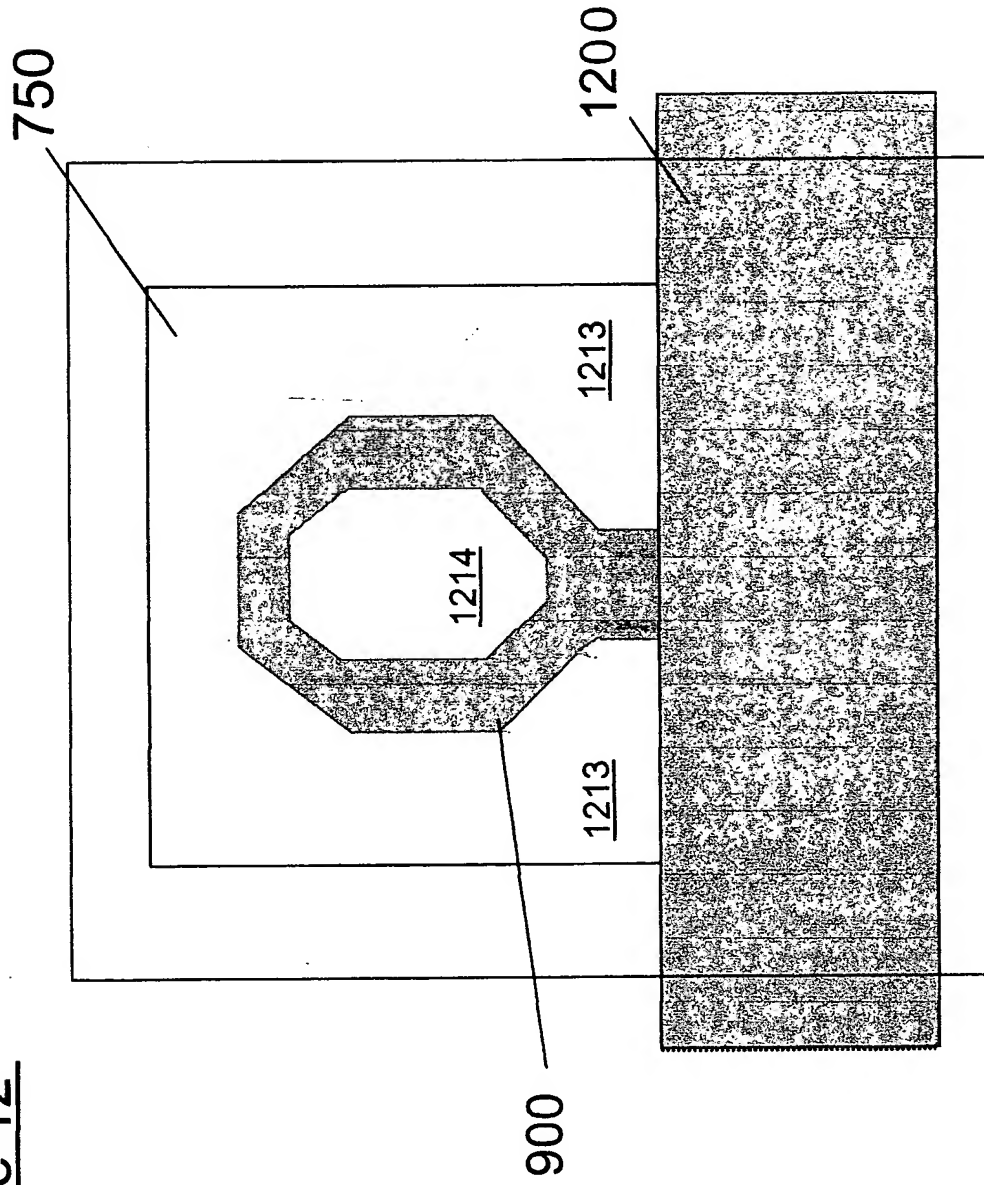


Figure 13

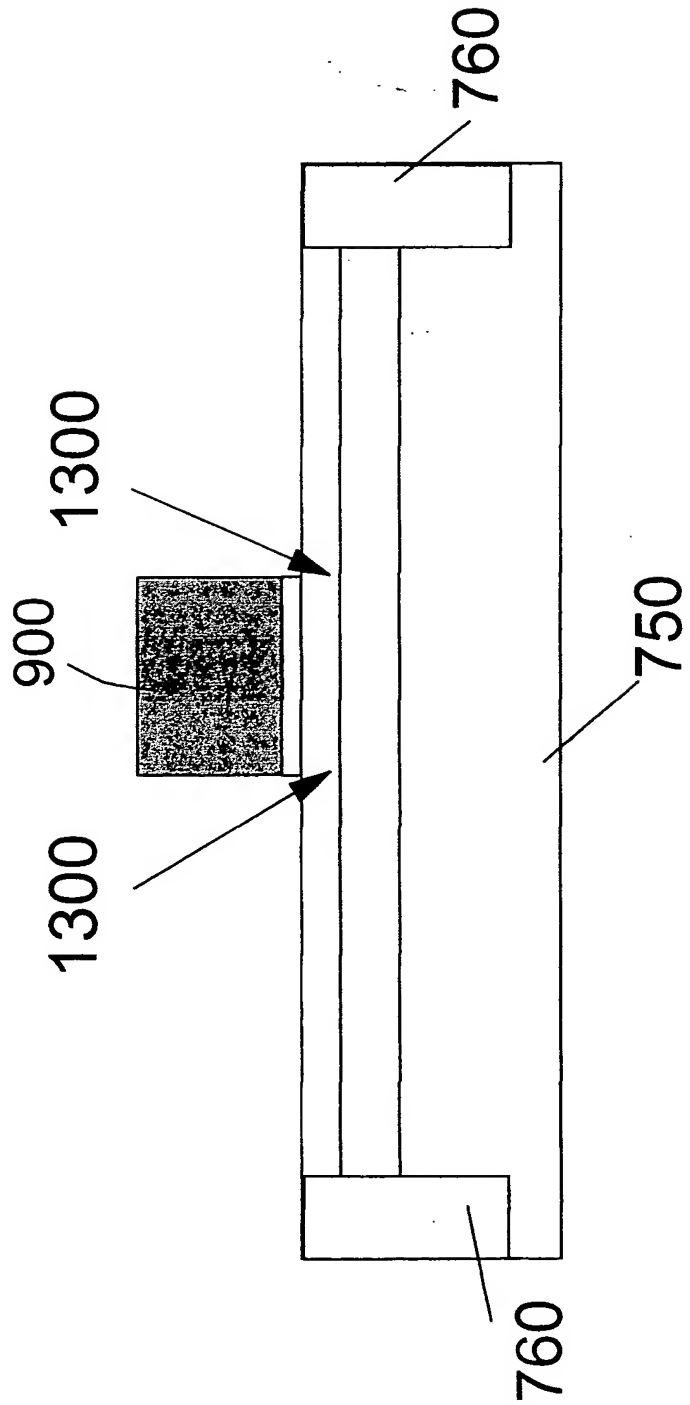


Figure 14

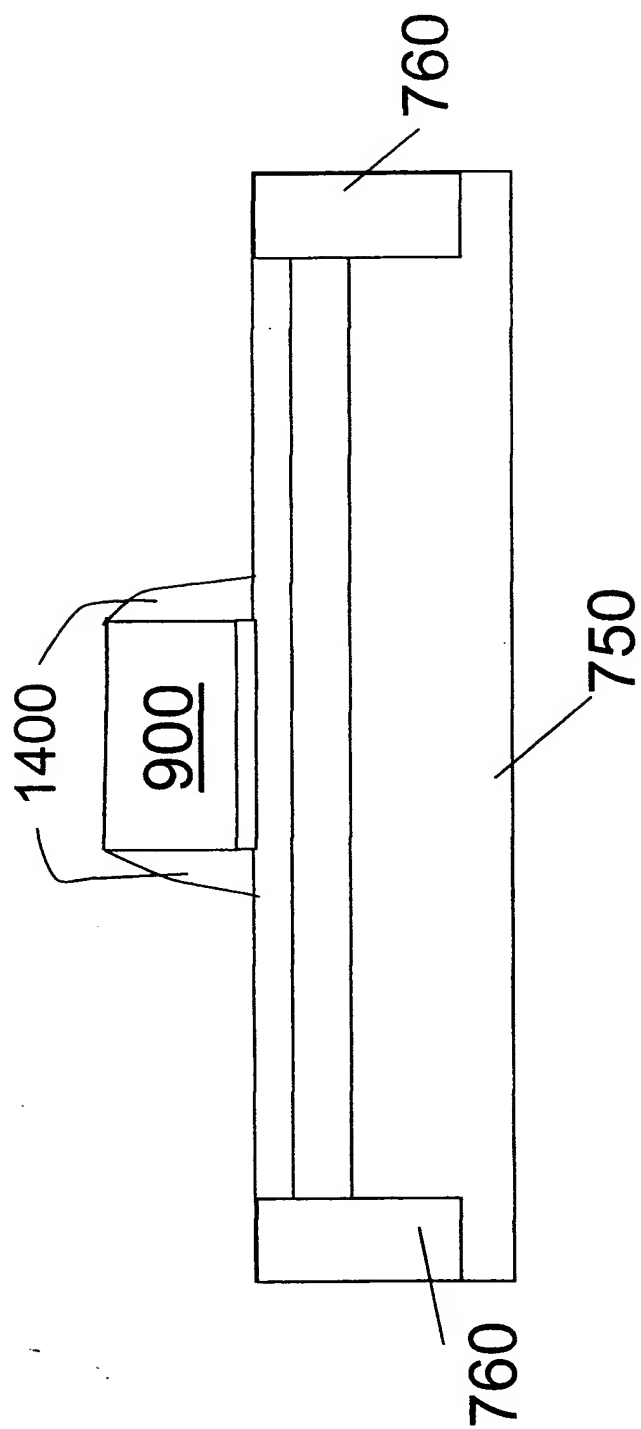


Figure 15

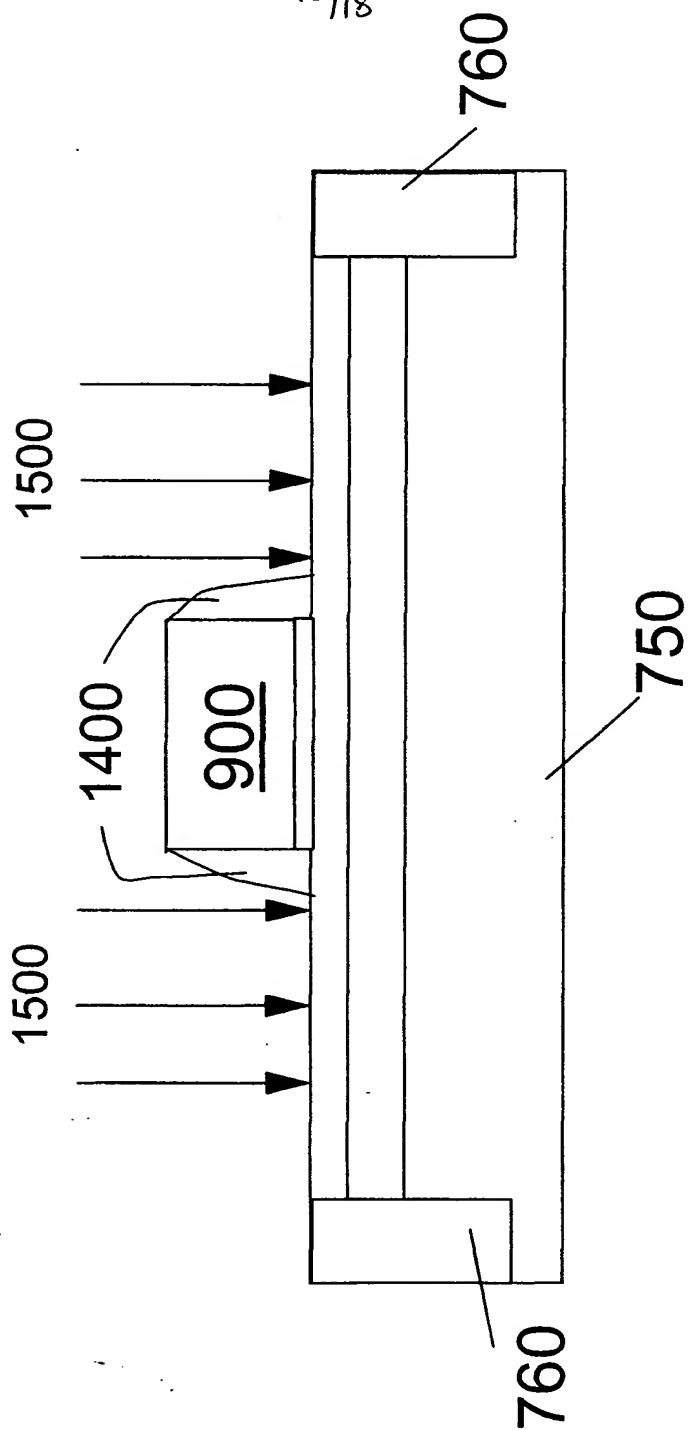


Figure 16

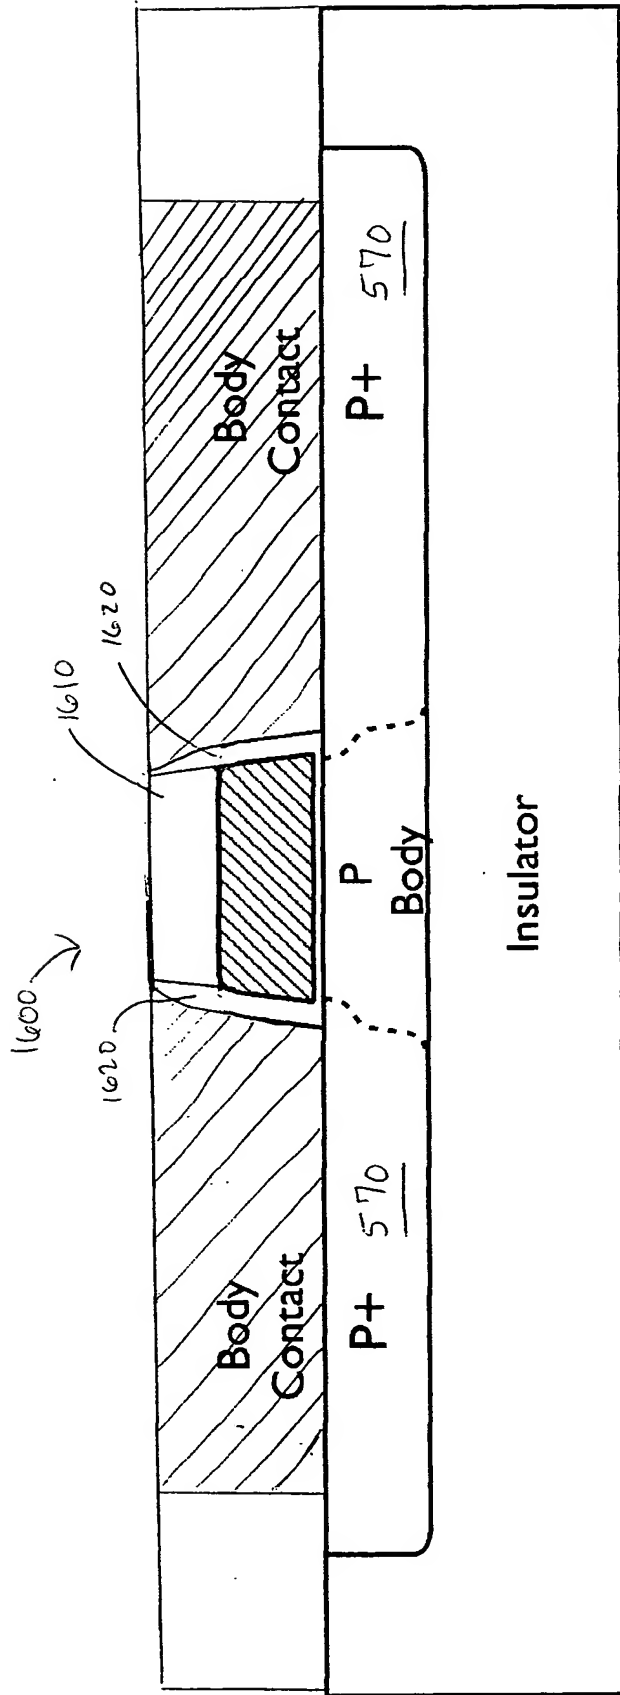


Figure 17

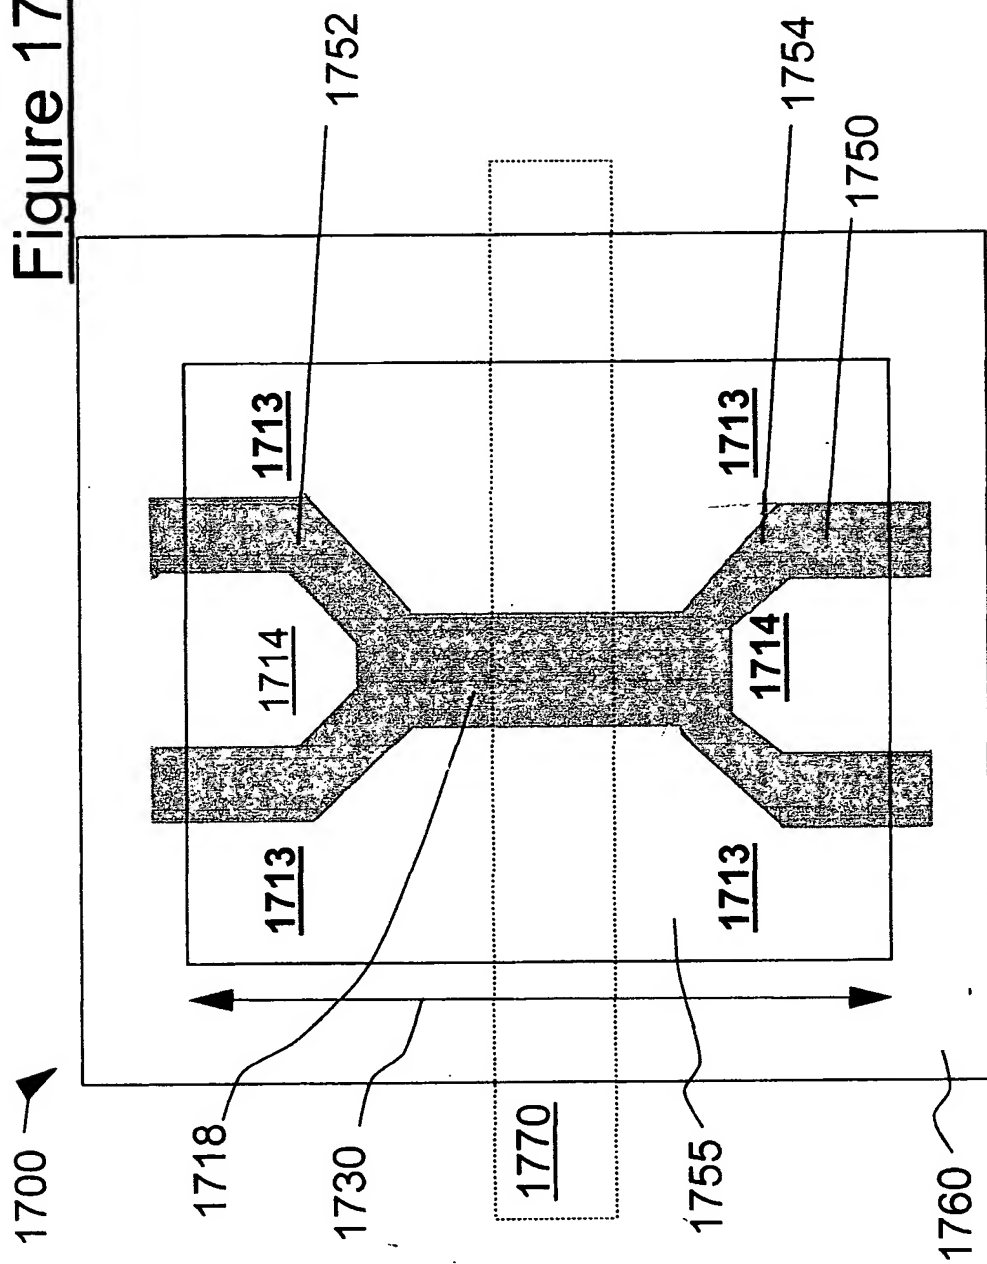


Figure 18 is a schematic diagram of a device 1800. The device includes a central octagonal opening 1814, surrounded by a thick black frame 1813. This frame is connected to two horizontal bars 1850 and 1820. A dashed line 1890 indicates a boundary or connection point. The entire assembly is labeled 1800.